

DATA SHEET

TDA4851

Horizontal and vertical deflection
controller for VGA/XGA and
autosync monitors

Preliminary specification
File under Integrated Circuits, IC02

November 1992

Philips Semiconductors



PHILIPS

/

Horizontal and vertical deflection controller for VGA/XGA and autosync monitors

TDA4851

FEATURES

- VGA operation fully implemented including alignment-free vertical and E/W amplitude presettings
- 4th VGA mode easy applicable (XGA, Super VGA)
- Autosync operation externally selectable
- Low jitter
- All adjustments DC-controllable
- Alignment-free oscillators
- Sync separators for video or horizontal and vertical TTL sync levels regardless of polarity
- Horizontal oscillator with PLL1 for sync and PLL2 for flyback
- Constant vertical and E/W amplitude in autosync operation
- DC-coupling to vertical power amplifier
- Internal supply voltage stabilization with excellent ripple rejection to ensure stable geometrical adjustments

QUICK REFERENCE DATA

SYMBOL	PARAMETER	MIN.	TYP.	MAX.	UNIT
V_P	positive supply voltage (pin 1)	9.2	12	16	V
I_P	supply current	–	40	–	mA
$V_{i\text{ sync}}$	AC-coupled composite video signal with negative-going sync (peak-to-peak value, pin 9)	–	1	–	V
	sync slicing level	–	120	–	mV
	DC-coupled TTL-compatible horizontal sync signal (peak-to-peak value, pin 9)	1.7	–	–	V
	slicing level	1.2	1.4	1.6	V
	DC-coupled TTL-compatible vertical sync signal (peak-to-peak value, pin 10)	1.7	–	–	V
	slicing level	1.2	1.4	1.6	V
$I_{o\text{ v}}$	vertical differential output current (peak-to-peak value, pins 5 and 6)	–	1	–	mA
$I_{o\text{ H}}$	horizontal sink output current on pin 3	–	–	60	mA
T_{amb}	operating ambient temperature range	0	–	+70	°C

GENERAL DESCRIPTION

The TDA4851 is a monolithic integrated circuit for economical solutions in VGA/XGA and autosync monitors. The IC incorporates the complete horizontal and vertical small signal processing.

VGA-dependent mode detection and settings are performed on chip. In conjunction with TDA4860/61/65, or TDA8351 (vertical output circuits) the ICs offer an extremely advanced system solution.

ORDERING INFORMATION

EXTENDED TYPE NUMBER	PACKAGE			
	PINS	PIN POSITION	MATERIAL	CODE
TDA4851	20	DIL	plastic	SOT146

Horizontal and vertical deflection controller for VGA/XGA and autosync monitors

TDA4851

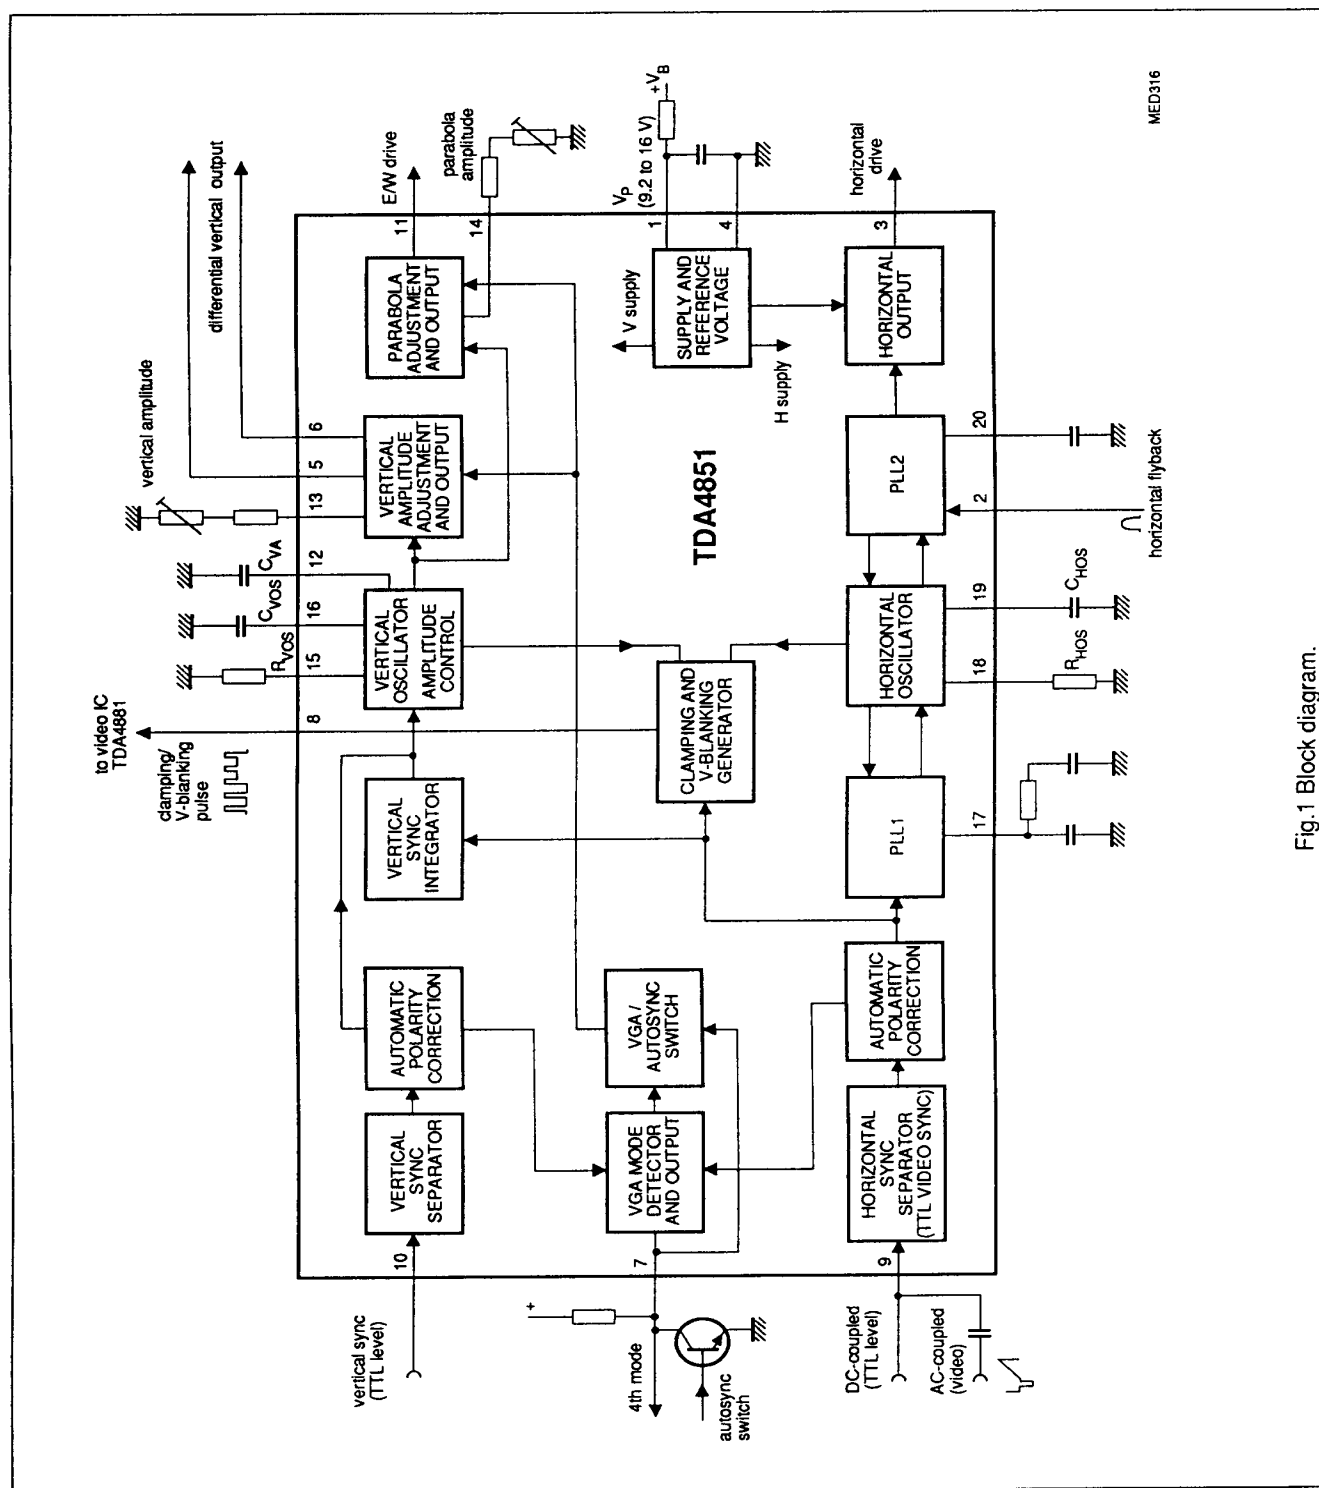



Fig.1 Block diagram.

Horizontal and vertical deflection controller for VGA/XGA and autosync monitors

TDA4851

PINNING

SYMBOL	PIN	DESCRIPTION
V _P	1	positive supply voltage
FLB	2	horizontal flyback input
HOR	3	horizontal output
GND	4	ground (0 V)
VERT1	5	vertical output 1; negative-going sawtooth
VERT2	6	vertical output 2; positive-going sawtooth
MODE	7	4th mode output and autosync input
CLBL	8	clamping/blanking pulse output
HVS	9	horizontal sync/video input
VS	10	vertical sync input
EW	11	E/W output (parabola to driver stage)
C _{VA}	12	capacitor for amplitude control
R _{VA}	13	vertical amplitude adjustment input
R _{EW}	14	E/W amplitude adjustment input (parabola)
R _{VOS}	15	vertical oscillator resistor
C _{VOS}	16	vertical oscillator capacitor
PLL1	17	PLL1 phase
R _{HOS}	18	horizontal oscillator resistor
C _{HOS}	19	horizontal oscillator capacitor
PLL2	20	PLL2 phase

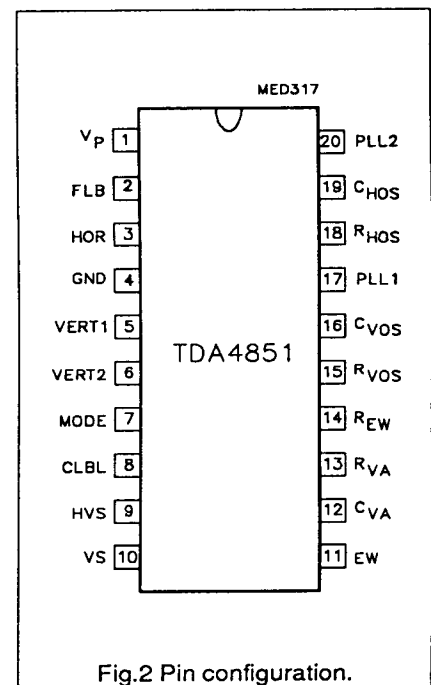

FUNCTIONAL DESCRIPTION

Horizontal sync separator and polarity correction

An AC-coupled video signal or a DC-coupled TTL sync signal (H only or composite sync) is input on pin 9. Video signals are clamped with top sync on 1.28 V, and are sliced at 1.4 V. This results in a fixed absolute slicing level of 120 mV related to top sync.

DC-coupled TTL sync signals are also sliced at 1.4 V, however with the clamping circuit in current limitation. The polarity of the separated sync is detected by internal integration of the signal, then the polarity is corrected. The polarity information is fed to the VGA mode detector. The corrected sync is input signal for the vertical sync integrator and the PLL1 stage.

Vertical sync separator, polarity correction and vertical sync integrator

DC-coupled vertical TTL sync signals may be applied to pin 10. They are sliced at 1.4 V. The polarity of the separated sync is detected by internal integration, then the polarity is corrected. The polarity information is fed to the VGA mode detector. If pin 10 is not used, it must be connected to ground.

The separated $V_{i\text{sync}}$ signal from pin 10, or the integrated composite sync signal from pin 9 (TTL or video) triggers directly the vertical oscillator.

VGA mode detector and mode output

The three standard VGA modes and a 4th not fixed mode are decoded by the polarities of the horizontal and the vertical sync input signals. An external resistor (from V_P to pin 7) is necessary to match this function. In

all three VGA modes the correct amplitudes are activated. The presence of the 4th mode is indicated by a HIGH on pin 7. This signal can be used externally to switch any horizontal or vertical parameters.

VGA mode detector input

For autosync operation the voltage on pin 7 must be externally forced to a level of < 50 mV. Vertical amplitude pre-settings for VGA are then inhibited. The delay time between vertical trigger pulse and the start of vertical deflection changes from 575 μ s to 300 μ s (575 μ s is needed for VGA). The vertical amplitude then remains constant in a frequency range from 50 Hz up to 110 Hz.

Horizontal and vertical deflection controller for VGA/XGA and autosync monitors

TDA4851

Clamping and V-blanking generator

A combined clamping and V-blanking pulse is available on pin 8 (suitable for the video pre-amplifier TDA4881). The lower level of 1.9 V is the blanking signal derived from the vertical blanking pulse from the internal vertical oscillator.

Vertical blanking equals the delay between vertical sync and start of vertical scan. By this, an optimum blanking is achieved for VGA/XGA and autosync operation (selectable via pin 7).

The upper level of 5.4 V is the horizontal clamping pulse with an internally fixed pulse width of 0.8 μ s.

A monoflop, which is triggered by the trailing edge of the horizontal sync pulse, generates this pulse. If composite sync is applied, one clamping pulse per H-period is generated during V-sync. The phase of the clamping pulse may change during V-sync (see Fig.8).

PLL1 phase detector

The phase detector is a standard type using switched current sources. The middle of the sync is compared with a fixed point of the oscillator sawtooth voltage. The PLL filter is connected to pin 17. If composite sync is applied, the disturbed control voltage is corrected during V-sync (see Fig.8).

Horizontal oscillator

This oscillator is of the relaxation type and requires a fixed capacitor of 10 nF at pin 19. By changing the current into pin 18 the whole frequency range from 13 to 100 kHz can be covered.

The current can be generated either by a frequency to voltage converter or by a resistor. A frequency adjustment may also be added if necessary.

The PLL1 control voltage at pin 17 modulates via a buffer stage the oscillator thresholds. A high DC-loop gain ensures a stable phase relationship between horizontal sync and line flyback pulses.

PLL2 phase detector

This phase detector is similar to the PLL1 phase detector. Line flyback signals (pin 2) are compared with a fixed point of the oscillator sawtooth voltage. Delays in the horizontal deflection circuit are compensated by adjusting the phase relationship between horizontal sync and horizontal output pulses.

A certain amount of phase adjustment is possible by injecting a DC current from an external source into the PLL2 filter capacitor at pin 20.

Horizontal driver

This open-collector output stage (pin 3) can directly drive an external driver transistor. The saturation voltage is less than 300 mV at 20 mA.

To protect the line deflection transistor, the horizontal output stage does not conduct for $V_P < 6.4$ V (pin 1).

Vertical oscillator and amplitude control

This stage is designed for fast stabilization of the vertical amplitude after changes in sync conditions.

The free-running frequency f_0 is determined by the values of R_{VOS} and C_{VOS} . The recommended values should be altered marginally only to preserve the excellent linearity and noise performance. The vertical drive currents I_5 and I_6 are in relation to the value of R_{VOS} . Therefore, the oscillator frequency must be determined only by C_{VOS} on pin 16.

$$f_0 = \frac{1}{10.8 \times R_{VOS} \times C_{VOS}}$$

To achieve a stabilized amplitude the free-running frequency f_0 (without adjustment) must be lower than the lowest occurring sync frequency. The following contributions can be assumed:

minimum frequency offset between f_0 and the lowest trigger frequency	10%
spread of IC	$\pm 3\%$
spread of R (22 k Ω)	$\pm 1\%$
spread of C (0.1 μ F)	$\pm 5\%$
	19%

Result: $f_0 = \frac{50}{1.19}$ Hz = 42 Hz
(for 50 to 110 Hz application)

Table 1 VGA modes

MODE	H / V SYNC POLARITY	FREQUENCY H (kHz)	FREQUENCY V (Hz)	NUMBER OF ACTIVE LINES	MODE OUTPUT PIN 7
1	+ / -	31.45	70	350	LOW
2	- / +	31.45	70	400	LOW
3	- / -	31.45	60	480	LOW
4	+ / +	fixed by external circuitry	-	-	HIGH
autosync	*/*	fixed by external circuitry	-	-	forced to GND

Horizontal and vertical deflection controller for VGA/XGA and autosync monitors

TDA4851

LIMITING VALUES

In accordance with the Absolute Maximum Rating System (IEC 134)

SYMBOL	PARAMETER	MIN.	MAX.	UNIT
V _P	supply voltage (pin 1)	−0.5	16	V
V _{3,7}	voltage on pins 3 and 7	−0.5	16	V
V ₈	voltage on pin 8	−0.5	7	V
V _n	voltage on pins 5, 6, 9, 10, 13, 14 and 18	−0.5	6.5	V
I ₂	current on pin 2	−	±10	mA
I ₃	current on pin 3	−	100	mA
I ₇	current on pin 7	−	20	mA
I ₈	current on pin 8	−	−10	mA
T _{stg}	storage temperature range	−55	+150	°C
T _{amb}	operating ambient temperature range	0	70	°C
T _j	maximum junction temperature	0	+150	°C
V _{ESD}	electrostatic handling for all pins (note 1)	−	±400	V

Note to the Limiting Values

1. Equivalent to discharging a 200 pF capacitor through a 0 Ω series resistor.

THERMAL RESISTANCE

SYMBOL	PARAMETER	THERMAL RESISTANCE
R _{thj-a}	from junction to ambient in free air	65 K/W

CHARACTERISTICS

V_P = 12 V; T_{amb} = +25 °C; measurements taken in Fig.3 unless otherwise specified

SYMBOL	PARAMETER	CONDITIONS	MIN.	TYP.	MAX.	UNIT
V _P	positive supply voltage (pin 1)		9.2	12	16	V
I _P	supply current	I ₁₈ = −1.05 mA	—	36	44	mA
		I ₁₈ = −3.388 mA	—	40	49	mA
Internal reference voltage						
V _{ref}	internal reference voltage		6.0	6.25	6.5	V
TC	temperature coefficient	T _{amb} = +20 to +100 °C	—	—	±90	10 ^{−6} /K
PSRR	power supply ripple rejection	f = 1 kHz sinewave	60	75	—	dB
		f = 1 MHz sinewave	25	35	—	dB
V _P	supply voltage (pin 1) to ensure all internal reference voltages		9.2	—	16	V
Composite sync input (AC-coupled)		V _{I0} = 5 V				
V _{i sync}	sync amplitude of video input signal (pin 9)	sync on green	—	300	—	mV
	top sync clamping level		1.1	1.28	1.5	V
	slicing level above top sync level	R _S = 50 Ω	90	120	150	mV
R _S	allowed source resistance for 7% duty factor	V _{i sync} > 200 mV	—	—	1.5	kΩ
r _g	differential input resistance	during sync	—	80	—	Ω
I _g	charging current of coupling capacitor	V _g > 1.5 V	1.3	2	3	μA

Horizontal and vertical deflection controller for VGA/XGA and autosync monitors

TDA4851

SYMBOL	PARAMETER	CONDITIONS	MIN.	TYP.	MAX.	UNIT
t_{int}	vertical sync integration time to generate vertical trigger pulse	$f_H = 31 \text{ kHz};$ $I_{18} = -1.050 \text{ mA}$	7	10	13	μs
		$f_H = 64 \text{ kHz};$ $I_{18} = -2.169 \text{ mA}$	3.5	5	6.5	μs
		$f_H = 100 \text{ kHz};$ $I_{18} = -3.388 \text{ mA}$	2.5	3.4	4.5	μs
Horizontal sync input (DC-coupled, TTL-compatible)						
$V_{i \text{ sync}}$	sync input signal (peak-to-peak value, pin 9)		1.7	—	—	V
	slicing level		1.2	1.4	1.6	V
t_p	minimum pulse width		700	—	—	ns
t_r, t_f	rise time and fall time		10	—	500	ns
I_9	input current	$V_9 = 0.8 \text{ V}$	—	—	—200	μA
		$V_9 = 5.5 \text{ V}$	—	—	10	μA
Automatic horizontal polarity switch		H-sync on pin 9				
$t_p H/t_H$	horizontal sync pulse width related to t_H (duty factor for automatic polarity correction)		—	—	30	%
t_p	delay time for changing sync polarity		0.3	—	1.8	ms
Vertical sync input (DC-coupled, TTL-compatible)		V-sync on pin 10				
$V_{i \text{ sync}}$	sync input signal (peak-to-peak value, pin 10)		1.7	—	—	V
	slicing level		1.2	1.4	1.6	V
I_{10}	input current	$0 < V_{10} < 5.5 \text{ V}$	—	—	± 10	μA
$t_p V$	maximum vertical sync pulse width for automatic vertical polarity switch		—	—	300	μs
Horizontal mode detector output		VGA mode				
V_7	output saturation voltage LOW (for Modes 1, 2 and 3)	$I_7 = 6 \text{ mA}$	—	0.275	0.33	V
	output voltage HIGH	mode 4	—	—	V_P	V
I_7	load current range to force VGA mode-dependent vertical and parabola amplitudes	modes 1, 2 and 3	2	—	6	mA
	output current	mode 4	—	0	—	mA
VGA / autosync mode switch						
V_7	input voltage LOW to force autosync mode		0	—	50	mV
Horizontal clamping / blanking generator output		Fig.6				
V_8	output voltage LOW		—	—	0.9	V
	blanking output voltage	internal V blanking	1.6	1.9	2.2	V
	clamping output voltage	H-sync on pin 9	5.15	5.4	5.65	V
I_8	internal sink current for all output levels	H and V scanning	2.3	2.9	3.5	mA
	external load current		—	—	—3.0	mA
t_8	clamping pulse start		with end of H-sync			
t_{clp}	clamping pulse width	$V_8 = 3 \text{ V}$	0.6	0.8	1.0	μs
S	steepness of rise and fall times		—	60	75	ns/V

Horizontal and vertical deflection controller for VGA/XGA and autosync monitors

TDA4851

SYMBOL	PARAMETER	CONDITIONS	MIN.	TYP.	MAX.	UNIT
Vertical oscillator		$V_{ref} = 6.25\text{ V}$				
f_0	vertical free-running frequency	$R_{15} = 22\text{ k}\Omega$; $C_{16} = 0.1\text{ }\mu\text{F}$	—	42	—	Hz
f_v	nominal vertical sync range	no f_0 adjustment	50	—	110	Hz
V_{15}	voltage on pin 15	$R_{15} = 22\text{ k}\Omega$	2.8	3.0	3.2	V
t_d	delay between sync pulse and start of vertical scan	measured on pin 8				
	in VGA/XGA mode, activated by an external resistor on pin 7		500	575	650	μs
	in autosync mode	$V_7 < 50\text{ mV}$	240	300	360	μs
I_{12}	control current for amplitude control		—	± 200	—	μA
C_{12}	capacitor for amplitude control		—	—	0.18	μF
Vertical differential output		Fig.7				
I_o	differential output current between pins 5 and 6 (peak-to-peak value)	mode 3; $I_{13} > -135\text{ }\mu\text{A}$; $R_{15} = 22\text{ k}\Omega$	0.9	1.0	1.1	mA
	maximum offset-current error	$I_o = 1\text{ mA}$	—	—	± 2.5	%
	maximum linearity error		—	—	± 1.5	%
Vertical amplitude adjustment (in percentage of output signal)						
V_{13}	input voltage		—	5.0	—	V
I_{13}	adjustment current	$I_{o\text{ max}}$ (100%)	—110	—120	—135	μA
		$I_{o\text{ min}}$ (typically 58%)	—	0	—	μA
$\Delta I_o/\Delta t$	VGA mode-dependent pre-settings activated by an external resistor on pin 7	Table 1; note 1				
	Mode 1		116.2	116.8	117.4	%
	Mode 2		101.6	102.2	102.8	%
	Mode 3		—	100	—	%
	Mode 4		—	100	—	%
	autosync operation (VGA operation disabled)	$V_7 < 50\text{ mV}$	—	100	—	%
Horizontal comparator PLL1						
V_{17}	upper control voltage limitation		—	5.9	—	V
	lower control voltage limitation		—	5.1	—	V
I_{17}	control current	Fig.6	—	$\pm 0.083 I_{18}$	—	mA
Horizontal oscillator						
f_{osc}	centre frequency	$R_{18} = 2.4\text{ k}\Omega$ (pin 18); $C_{19} = 10\text{ nF}$ (pin 19)	—	31.45	—	kHz
	deviation of centre frequency		—	—	± 3	%
	temperature coefficient		0	+200	+300	$10^{-6}/\text{K}$
ϕ_H/t_H	relative holding/catching range		± 6	± 6.5	± 7.3	%
I_{18}	external oscillator current		—0.5	—	—4.3	mA
V_{18}	voltage at reference current input (pin 18)		2.35	2.5	2.65	V

Horizontal and vertical deflection controller for VGA/XGA and autosync monitors

TDA4851

SYMBOL	PARAMETER	CONDITIONS	MIN.	TYP.	MAX.	UNIT
Horizontal PLL2		Fig.6				
V ₂	upper clamping level of flyback input	I ₂ = 6 mA	–	5.5	–	V
	lower clamping level of flyback input	I ₂ = –1 mA	–	–0.75	–	V
	H-flyback slicing level		–	3.0	–	V
t _d /t _H	delay between middle of sync and middle of H-flyback related to t _H		–	3.0	–	%
V ₂₀	upper control voltage limitation		–	6.2	–	V
	lower control voltage limitation		–	4.8	–	V
I ₂₀	control current		–	±0.083 I ₁₈	–	μA
Δt/t _H	PLL2 control range related to t _H		30	–	–	%
Horizontal output (open-collector)		Fig.6				
V ₃	output voltage LOW	I ₃ = 20 mA	–	–	0.3	V
		I ₃ = 60 mA	–	–	0.8	V
t _p /t _H	t _H duty factor		42	45	48	%
V _P	threshold to activate under voltage protection	horizontal output off	–	5.6	–	V
		horizontal output on	–	5.8	–	V
Δt _H	jitter of horizontal output	f = 31 kHz	–	–	3.5	ns
		f = 64 kHz	–	–	1.9	ns
		f = 100 kHz	–	–	1.2	ns
E/W output		note 2				
V ₁₁	bottom output signal during mid-scan (pin 11)	internally stabilized	1.05	1.2	1.35	V
	top output signal during flyback		4.2	4.5	4.8	V
	temperature coefficient of output signal		–	–	250	10 ^{–6} /K
E/W amplitude adjustment (parabola)		Fig.7				
V ₁₄	input voltage (pin 14)		–	5.0	–	V
I ₁₄	adjustment current	100% parabola	–110	–120	–135	μA
		typically 28% parabola	–	0	–	μA



Notes to the characteristics

1. ΔI₀/Δt relative to value of Mode 3.
2. Parabola amplitude tracks with mode-dependent vertical amplitude but not with vertical amplitude adjustment. Tracking can be achieved by a resistor from vertical amplitude potentiometer to pin 14.

Horizontal and vertical deflection controller for VGA/XGA and autosync monitors

TDA4851

APPLICATION INFORMATION

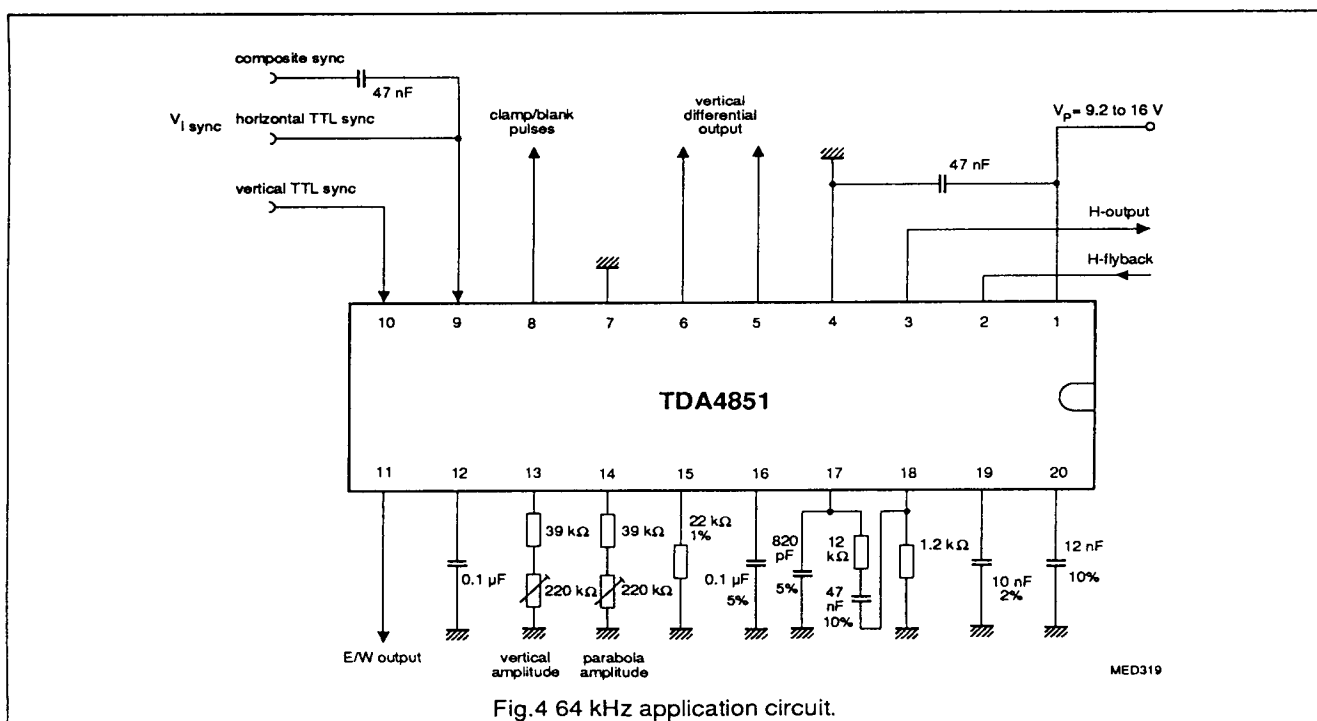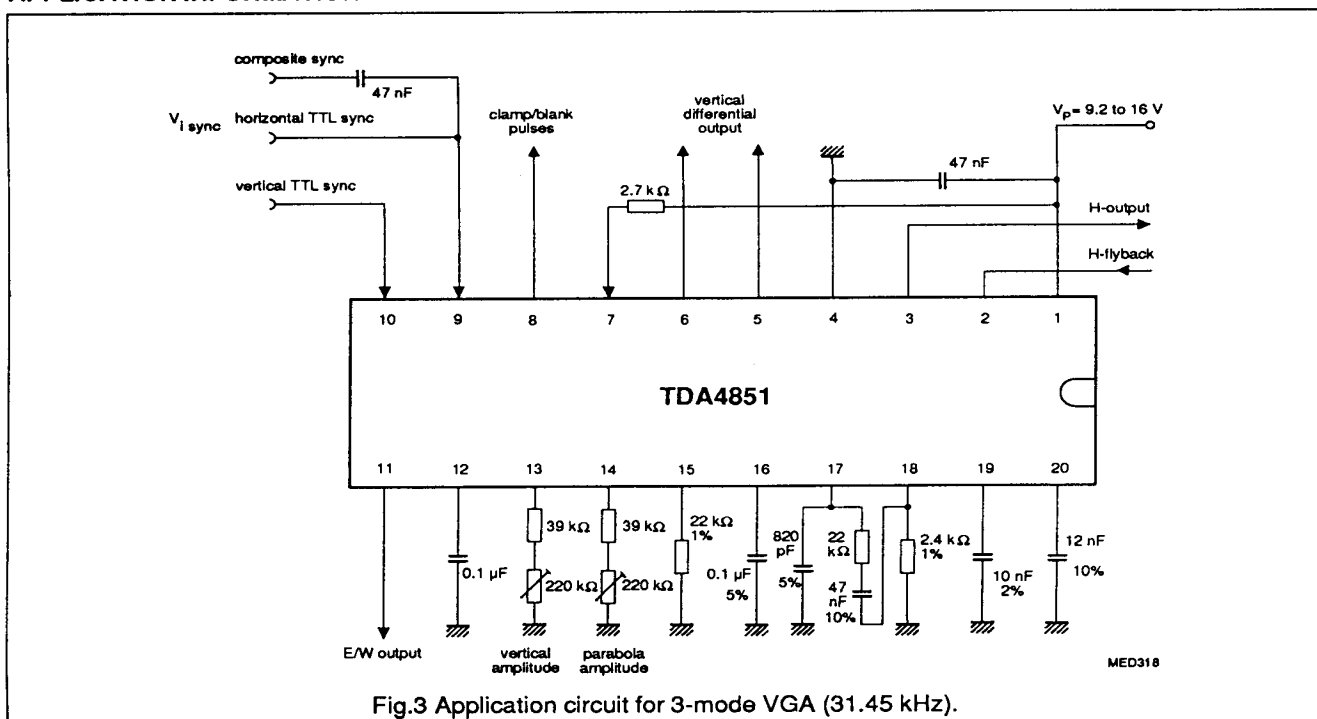

Horizontal and vertical deflection controller for VGA/XGA and autosync monitors

TDA4851


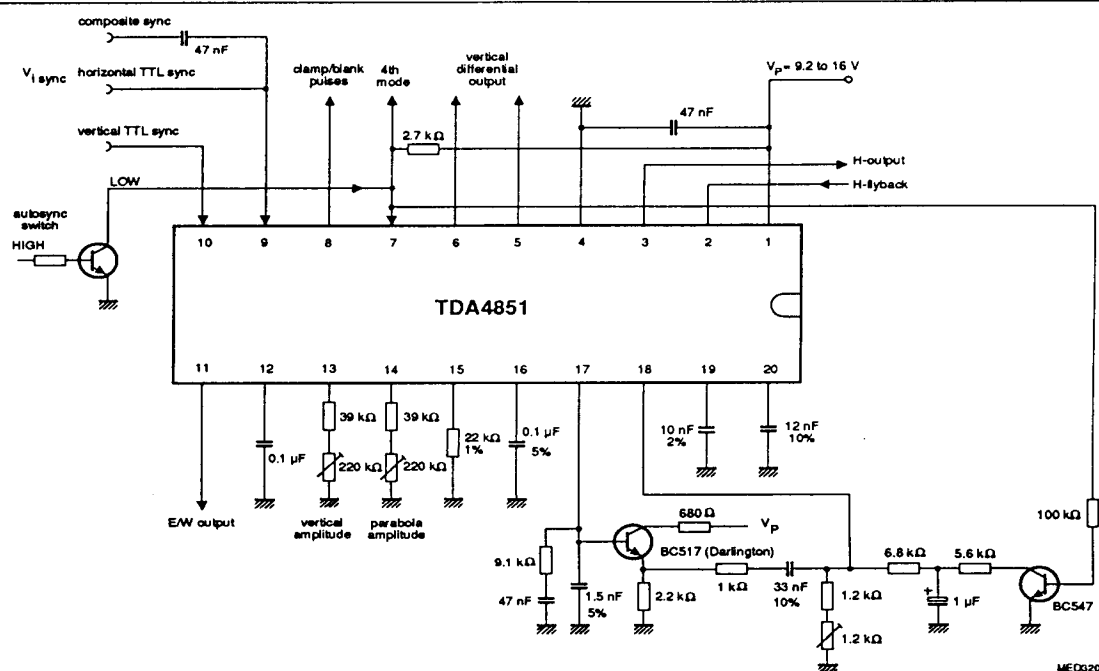


Fig.5 31 to 64 kHz application including 4-mode VGA.

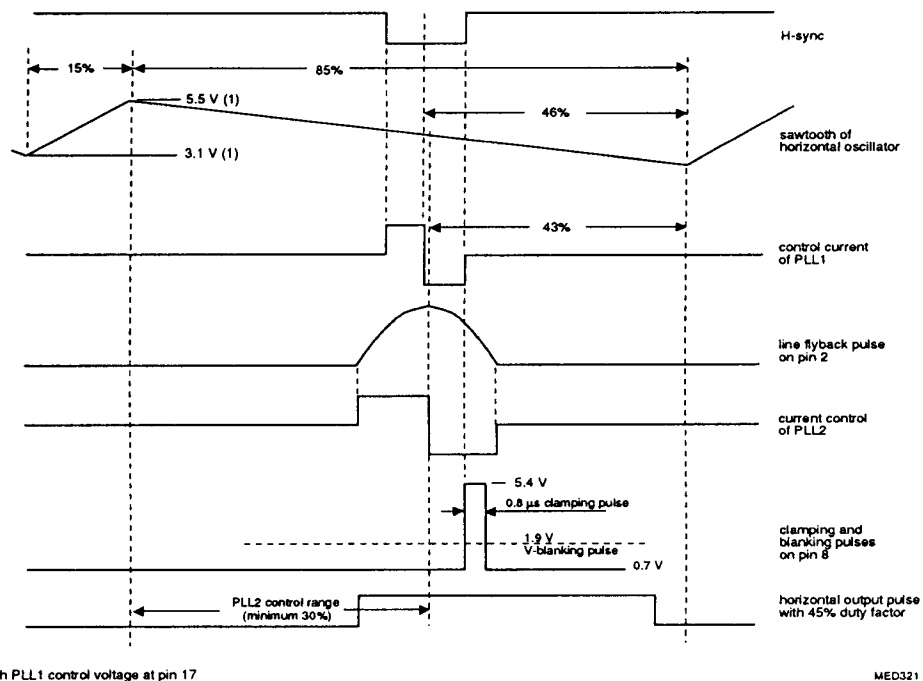

(1) tracks with PLL1 control voltage at pin 17

MED321

Fig.6 Horizontal timing diagram.

Horizontal and vertical deflection controller for VGA/XGA and autosync monitors

TDA4851

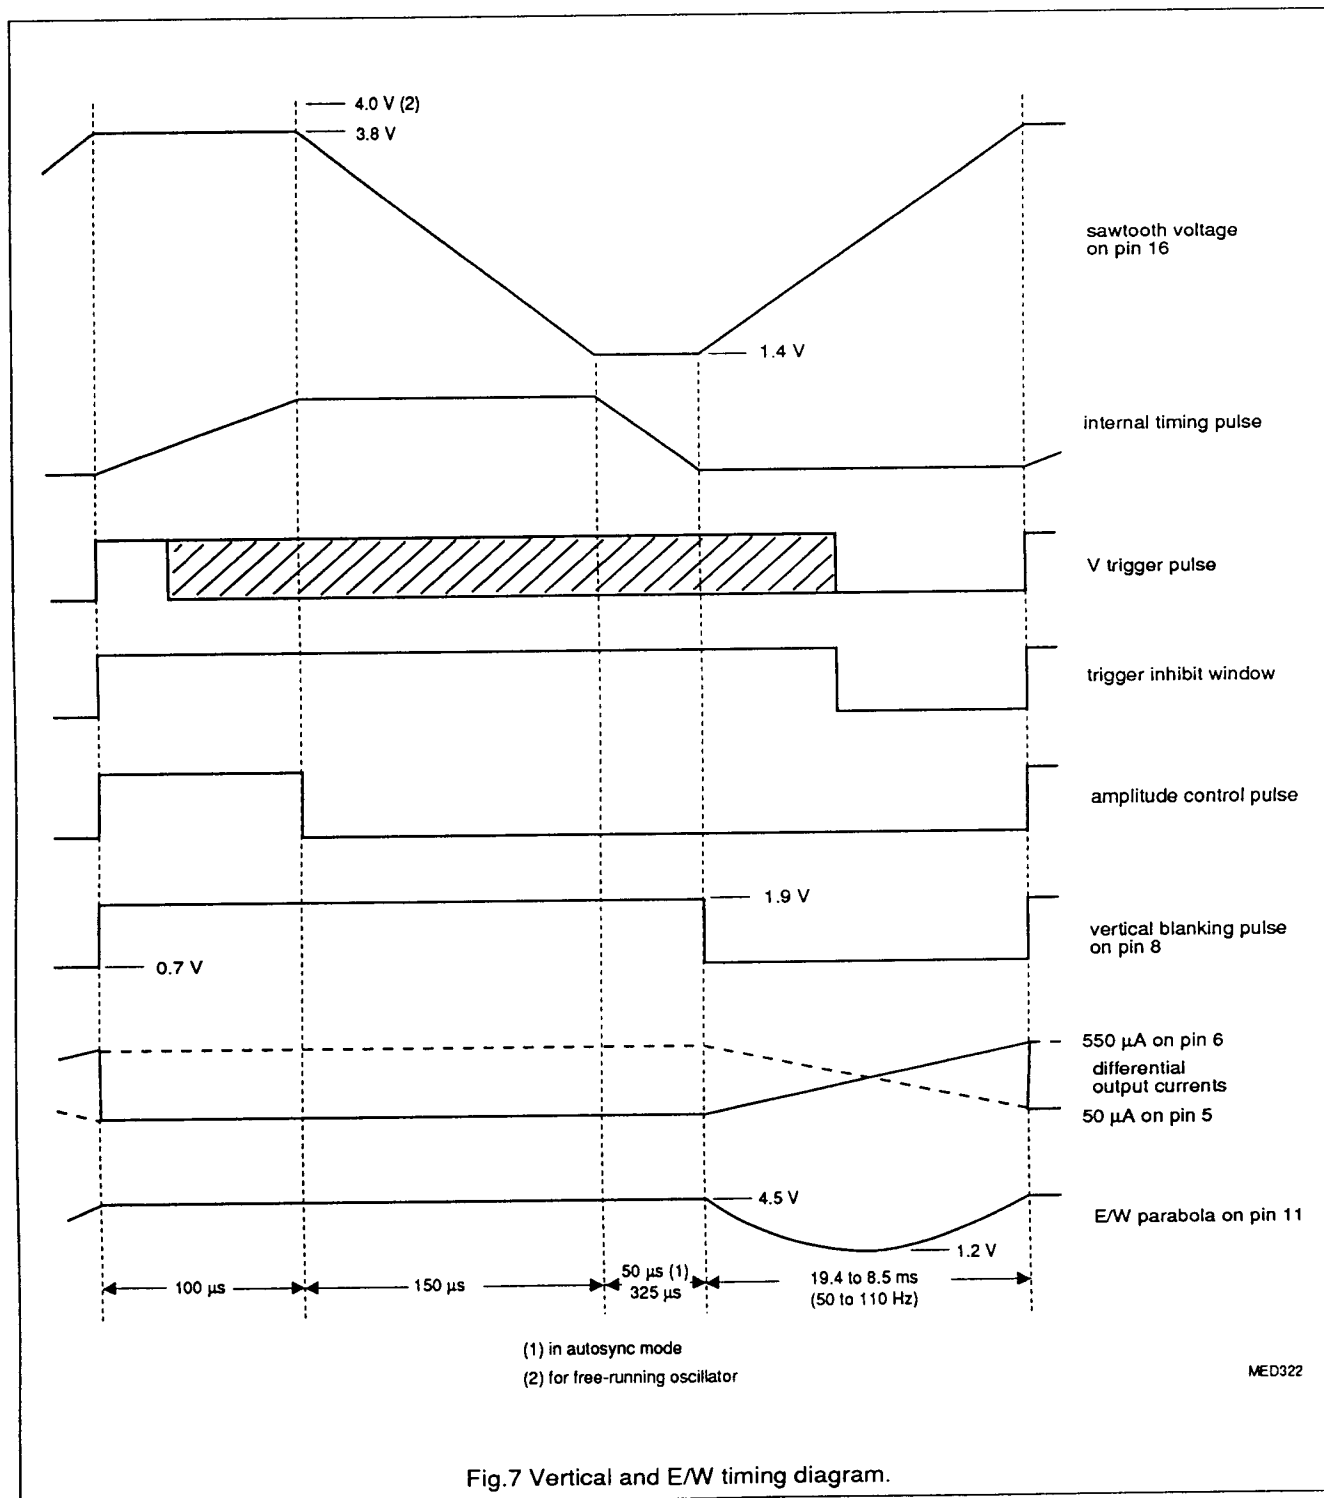


Fig.7 Vertical and E/W timing diagram.

MED322

Horizontal and vertical deflection controller
for VGA/XGA and autosync monitors

TDA4851

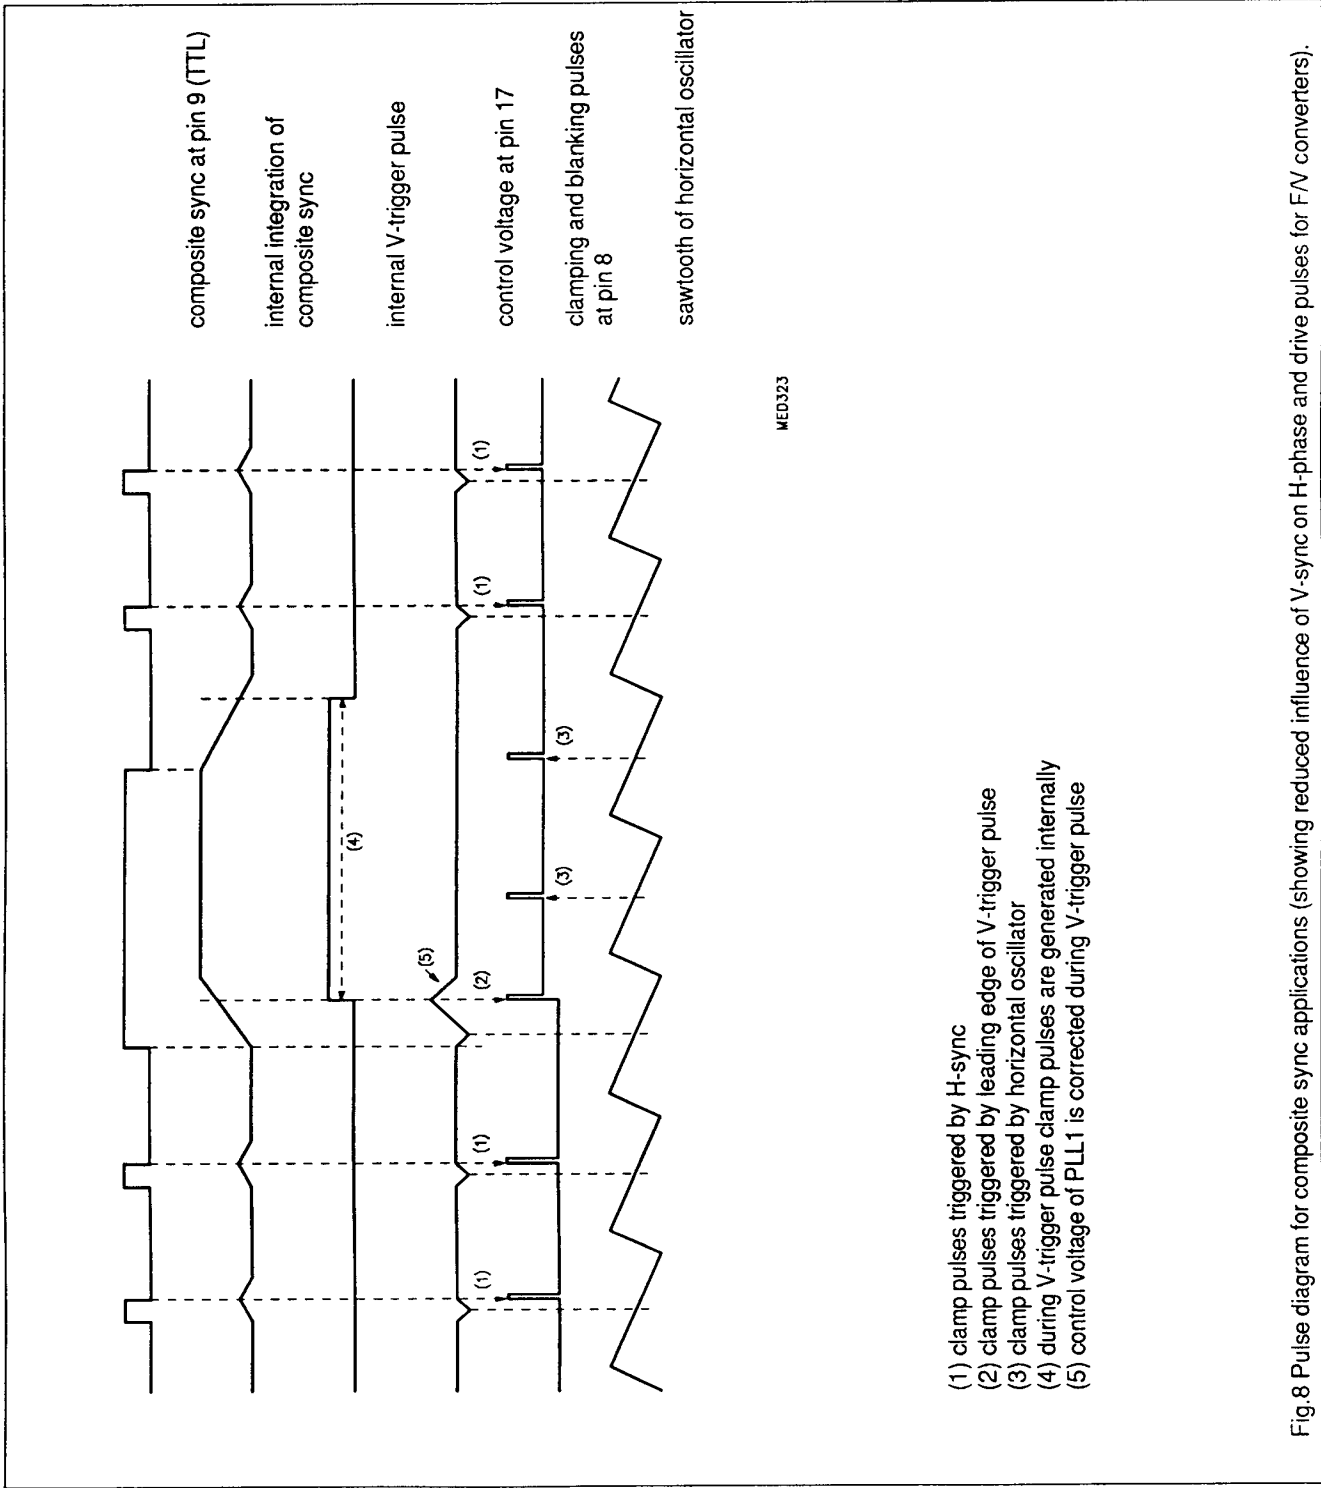


Fig. 8 Pulse diagram for composite sync applications (showing reduced influence of V-sync on H-phase and drive pulses for F/V converters).

Horizontal and vertical deflection controller
for VGA/XGA and autosync monitors

TDA4851


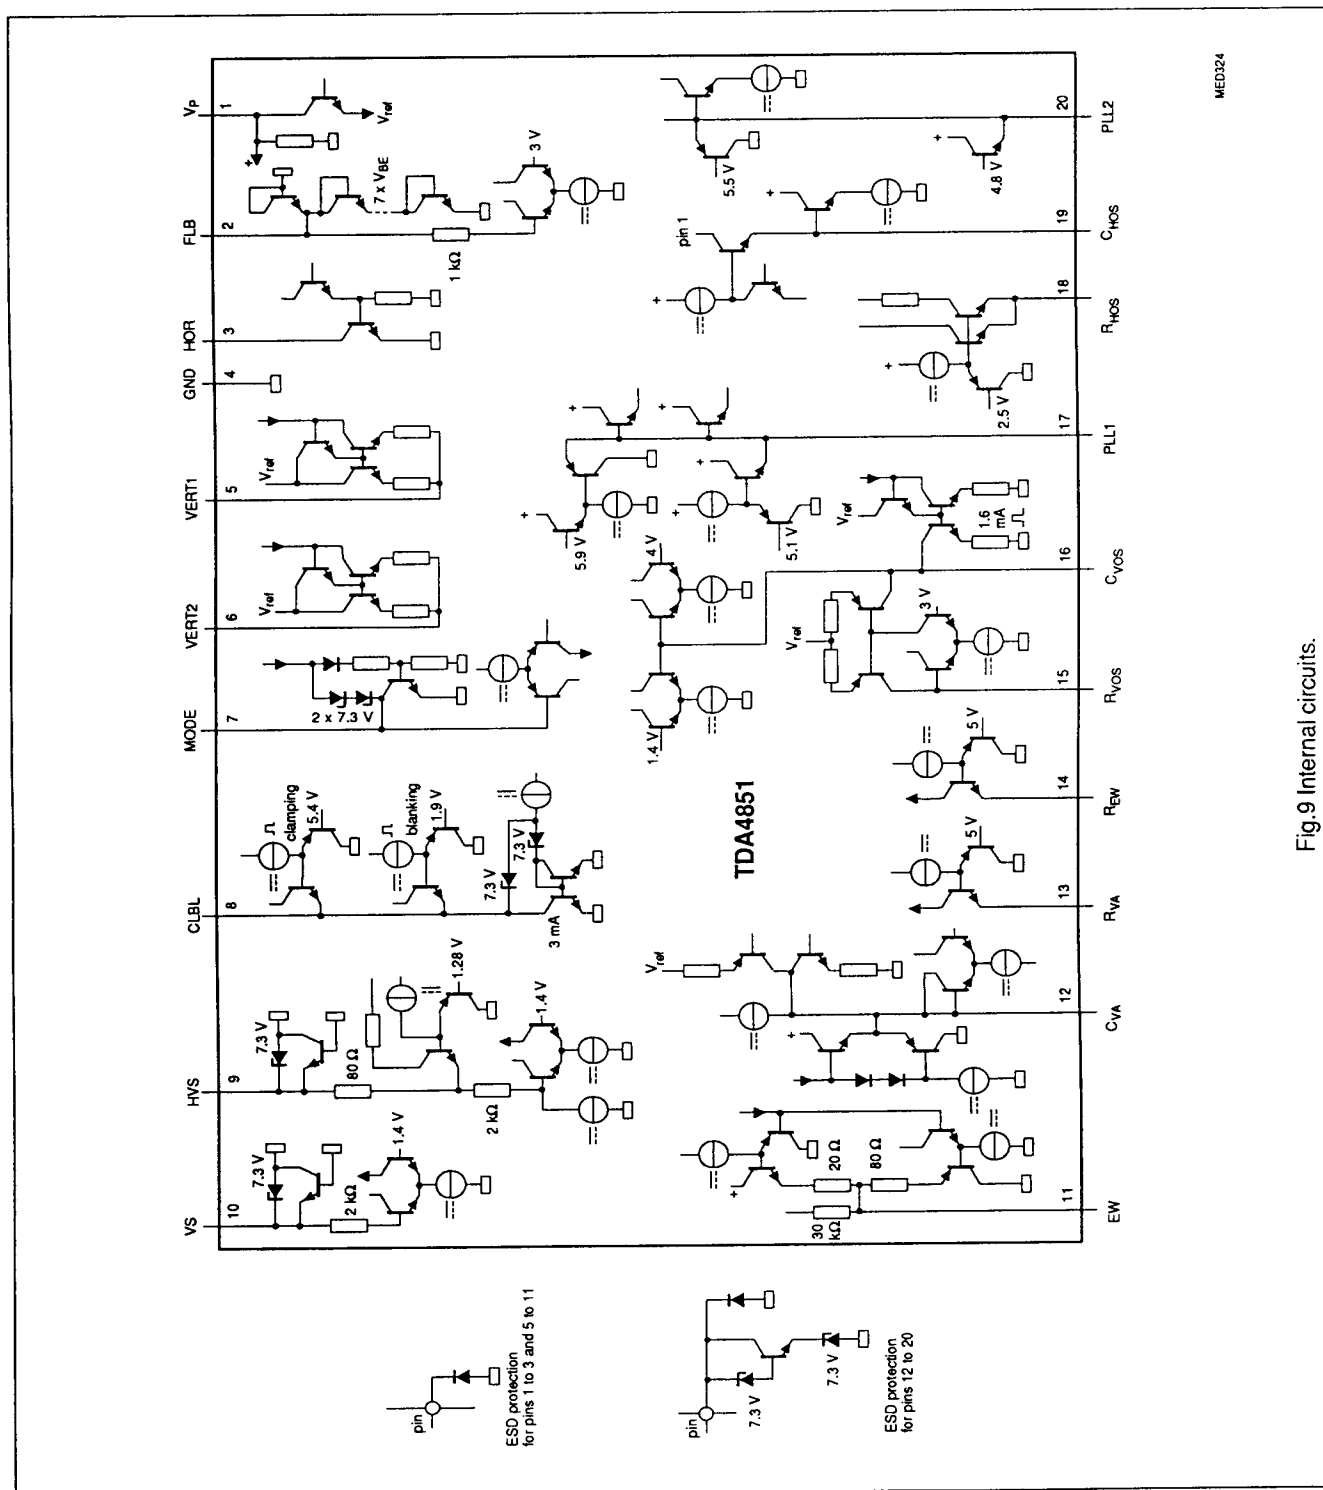


Fig.9 Internal circuits.

Horizontal and vertical deflection controller
for VGA/XGA and autosync monitors

TDA4851

PACKAGE OUTLINE

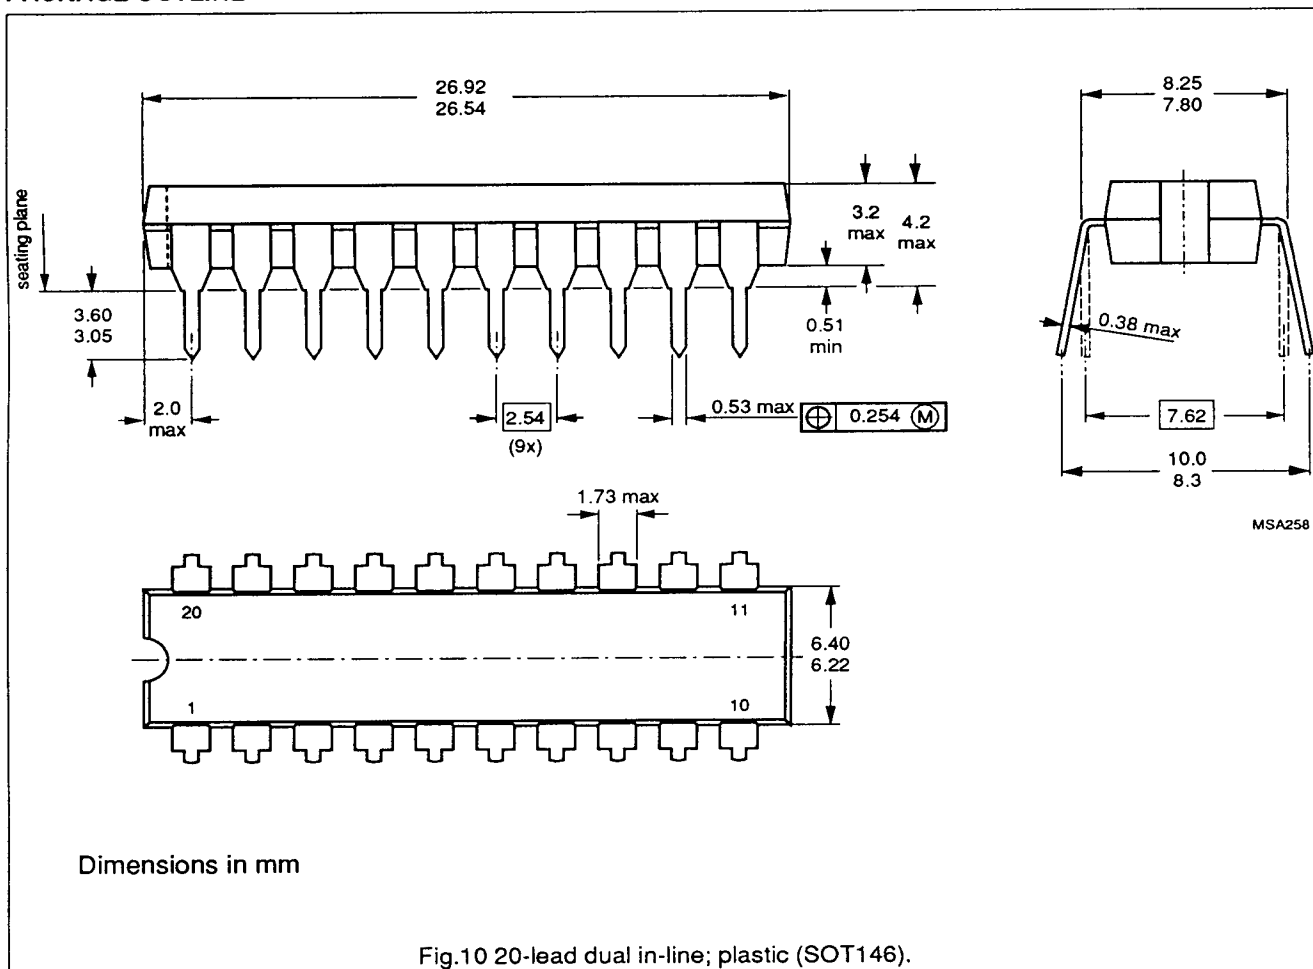

Horizontal and vertical deflection controller for VGA/XGA and autosync monitors

TDA4851

SOLDERING

Plastic dual in-line packages

BY DIP OR WAVE

The maximum permissible temperature of the solder is 260 °C; this temperature must not be in contact with the joint for more than 5 s. The total contact time of successive solder waves must not exceed 5 s.

The device may be mounted up to the seating plane, but the temperature of the plastic body must not exceed the specified storage maximum. If the printed-circuit board has been preheated, forced cooling may be necessary immediately after soldering to keep the temperature within the permissible limit.

REPAIRING SOLDERED JOINTS

Apply the soldering iron below the seating plane (or not more than 2 mm above it). If its temperature is below 300 °C it must not be in contact for more than 10 s; if between 300 and 400 °C, for not more than 5 s.

DEFINITIONS

Data sheet status	
Objective specification	This data sheet contains target or goal specifications for product development.
Preliminary specification	This data sheet contains preliminary data; supplementary data may be published later.
Product specification	This data sheet contains final product specifications.
Limiting values	
Limiting values given are in accordance with the Absolute Maximum Rating System (IEC 134). Stress above one or more of the limiting values may cause permanent damage to the device. These are stress ratings only and operation of the device at these or at any other conditions above those given in the Characteristics sections of this specification is not implied. Exposure to limiting values for extended periods may affect device reliability.	
Application information	
Where application information is given, it is advisory and does not form part of the specification.	

Philips Semiconductors – a worldwide company

Argentina IEROD, Juramento 1.991 - 14°B, 1428 Buenos Aires,
Tel. (541)786-76-35, Fax. (541)786-93-67

Australia 34 Waterloo Road, NORTH RYDE, NSW 2113,
Tel. (02)805 4455, Fax. (02)805 4466

Austria Triester Str. 64, 1101 WIEN,
Tel. (0222)60 101-0, Fax. (0222)60 101-1975

Belgium 80 Rue Des Deux Gares, B-1070 BRUXELLES,
Tel. (02)525 6111, Fax. (02)525 7246

Brazil Rua do Rocio 220, SAO PAULO-SP, CEP 04552,
P.O. Box 7383-CEP 01051,
Tel. (011)829-1166, Fax. (011)829-1849

Canada DISCRETE SEMICONDUCTORS: 601 Milner Ave,
SCARBOROUGH, ONTARIO, M1B 1M8, Tel. (416)292-5161
INTEGRATED CIRCUITS: 1 Eva Road, Suite 411, ETOBICOKE,
Ontario, M9C 4Z5, Tel. (416)626-6676

Chile Av. Santa Maria 0760, SANTIAGO,
Tel. (02)773 816

Colombia Carrera 21 No. 56-17, BOGOTA, D.E., P.O. Box 77621,
Tel. (01)249 7624

Denmark Prags Boulevard 80, PB 1919, DK-2300 COPENHAGEN S,
Tel. (32)88 3333, Fax. (32)96 0125

Finland Sinikalliontie 3, SF-02630 ESPOO,
Tel. (0)50261, Fax. (0)520971

France 117 Quai du Président Roosevelt, 92134 ISSY-LES-
MOULINEAUX Cedex,
Tel. (01)409 38 000, Fax. (01)409 38 127

Germany Burchardstrasse 19, D-2 HAMBURG 1,
Tel. (040)3296-0, Fax. (040)3296 213

Greece No. 15, 25th March Street, GR 17778 TAVROS,
Tel. (01)4894 339/4894 911

Hong Kong 15/F Philips Ind. Bldg., 24-28 Kung Yip St., KWAI CHUNG,
Tel. (04)245 121, Fax. (0)4806 960

India PEICO ELECTRONICS & ELECTRICALS LTD.,
Components Dept., Shivasagar Estate, Block 'A',
Dr. Annie Besant Rd., Worli, BOMBAY-400 018,
Tel. (022)4938 541, Fax. (022)4941 595

Indonesia Philips House, Jalan H.R. Rasuna Said Kav. 3-4,
P.O. Box 4252, JAKARTA 12950,
Tel. (021)5201 122, Fax. (021)5205 189

Ireland Newstead, Clonskeagh, DUBLIN 14,
Tel. (01)6933 55, Fax. (01)6978 56

Italy V. Le F. Testi, 327, 20162-MILANO,
Tel. (02)6752 2642, Fax. (02)6752 2648

Japan Philips Bldg 13-37, Kohnan 2-chome, Minato-ku, TOKIO 108,
Tel. (03)3740 5101, Fax. (03)3740 0 570

Korea (Republic of) Philips House, 260-199 Itaewon-dong,
Yongsan-ku, SEOUL, Tel. (02)794-5011, Fax. (02)798-8022

Malaysia No. 76 Jalan Universiti, 46200 PETALING JAYA,
SELANGOR, Tel. (03)7755 1088, Fax. (03)757 4880

Mexico Paseo Triunfo de la Republica, No. 215 Local 5, Cd Juarez
CHI HUA HUA 32340, Tel. (016)18-67-01/18-67-02

Netherlands Postbus 90050, 5600 PB EINDHOVEN,
Tel. (040)78 37 49, Fax. (040)78 83 99

New Zealand 2 Wagener Place, C.P.O. Box 1041, AUCKLAND,
Tel. (09)894-160, Fax. (09)897-811

Norway Box 1, Manglerud 0612, OSLO,
Tel. (02)74 8000, Fax. (02)74 8341

Pakistan Philips Markaz, M.A. Jinnah Rd., KARACHI-3,
Tel. (021)725 772

Peru Carretera Central 6.500, LIMA 3, Apartado 5612,
Tel. (014)35 00 59

Philippines PHILIPS SEMICONDUCTORS PHILIPPINES Inc,
106 Valero St. Salcedo Village, P.O. Box 911, MAKATI,
Metro MANILA, Tel. (02)810-0161, Fax. (02)817 3474

Portugal Av. Eng. Duarte Pacheco 6, 1009 LISBOA Codex,
Tel. (019)68 31 21, Fax. (019)65 80 13

Singapore Lorong 1, Toa Payoh, SINGAPORE 1231,
Tel. (65)350 2000, Fax. (65)251 6500

South Africa 195-215 Main Road, JOHANNESBURG 2000,
P.O. Box 7430, Tel. (011)8893 911, Fax. (011)8893 191

Spain Balmes 22, 08007 BARCELONA,
Tel. (03)301 6312, Fax. (03)301 4243

Sweden Tegeluddsvägen 1, S-11584 STOCKHOLM,
Tel. (0)8-7821 000, Fax. (0)8-782 9002

Switzerland Allmendstrasse 140-142, CH-8027 ZÜRICH,
Tel. (01)488 22 11, Fax. (01)482 85 95

Taiwan 581 Min Sheng East Road, P.O. Box 22978,
TAIPEI 10446, Tel. (2)509 7666, Fax. (2)500 5899

Thailand PHILIPS ELECTRICAL Co. of THAILAND Ltd.,
60/14 MOO 11, Bangna - Trad Road Km. 3
Prakanong, BANGKOK 10260,
Tel. (2)399-3280 to 9, (2)398-2083, Fax. (2)398-2080

Turkey Talatpasa Cad. No. 5, 80640 LEVENT/ISTANBUL,
Tel. (01)179 2770, Fax. (01)169 3094

United Kingdom Philips Semiconductors Limited, P.O. Box 65,
Philips House, Torrington Place, LONDON, WC1E 7HD,
Tel. (071)436 41 44, Fax. (071)323 03 42

United States INTEGRATED CIRCUITS:
811 East Arques Avenue, SUNNYVALE, CA 94088-3409,
Tel. (800)234-7831, Fax. (408)991-3581
DISCRETE SEMICONDUCTORS: 2001 West Blue Heron Blvd.,
P.O. Box 10330, RIVIERA BEACH, FLORIDA 33404,
Tel. (407)881-3200, Fax. (407)881-3300

Uruguay Coronel Mora 433, MONTEVIDEO,
Tel. (02)70-4044

Venezuela Calle 6, Ed. Las Tres Jotas, CARACAS, 1074A,
App. Post. 78117, Tel. (02)241 75 09

Zimbabwe 62 Mutare Road, HARARE, P.O. Box 994,
Tel. (04)47 211

For all other countries apply to: Philips Semiconductors,
International Marketing and Sales, Building BAF-1,
P.O. Box 218, 5600 MD, EINDHOVEN, The Netherlands,
Telex 35000 phtncnl, Fax. +31-40-724825

SCD12

© Philips Export B.V. 1992

All rights are reserved. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner.

The information presented in this document does not form part of any quotation or contract, is believed to be accurate and reliable and may be changed without notice. No liability will be accepted by the publisher for any consequence of its use. Publication thereof does not convey nor imply any license under patent- or other industrial or intellectual property rights.

Printed in The Netherlands

Date of release: 11-'92

9397 705 50011

Philips Semiconductors



17

PHILIPS

JAN 1 1993

034237 ✓ _ _ R