

TLP665J

OFFICE MACHINE

HOUSEHOLD USE EQUIPMENT

TRIAC DRIVER

SOLID STATE RELAY

The TOSHIBA TLP665J consists of a photo-triac optically coupled to a gallium arsenide infrared emitting diode in a six lead plastic DIP.


- Peak Off-State Voltage : 600V (Min.)
- Trigger LED Current : 10mA (Max.)
- On-State Current : 100mA (Max.)
- UL Recognized : UL1577, File No. E67349
- Isolation Voltage : 5000V_{rms} (Min.)
- Option (D4) type
VDE Approved : DIN VDE0884 / 08.87,
Certificate No. 68383

Maximum Operating Insulation Voltage : 650V_{PK}
Highest Permissible Over Voltage : 6000V_{PK}

(Note 1) When a VDE0884 approved type is needed,
please designate the “Option (D4)”


- Structural Parameter
Creepage Distance : 7.0mm (Min.)
Clearance : 7.0mm (Min.)
Insulation Thickness : 0.5mm (Min.)

Unit in mm

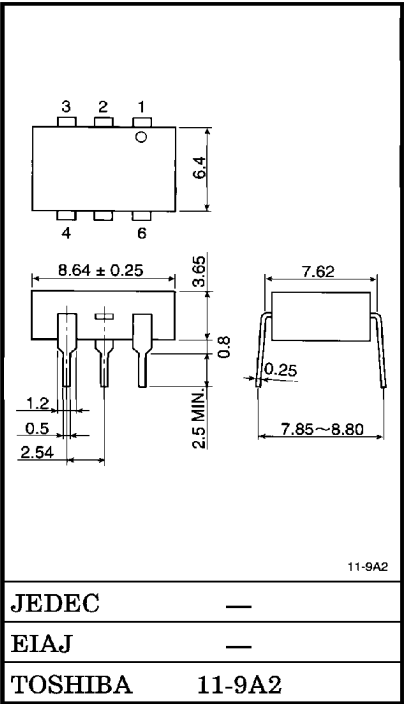

Weight : 0.44g

PIN CONFIGURATIONS (TOP VIEW)



- 1 : ANODE
- 2 : CATHODE
- 3 : NC
- 4 : TERMINAL 1
- 6 : TERMINAL 2

961001EAA2

● TOSHIBA is continually working to improve the quality and the reliability of its products. Nevertheless, semiconductor devices in general can malfunction or fail due to their inherent electrical sensitivity and vulnerability to physical stress. It is the responsibility of the buyer, when utilizing TOSHIBA products, to observe standards of safety, and to avoid situations in which a malfunction or failure of a TOSHIBA product could cause loss of human life, bodily injury or damage to property. In developing your designs, please ensure that TOSHIBA products are used within specified operating ranges as set forth in the most recent products specifications. Also, please keep in mind the precautions and conditions set forth in the TOSHIBA Semiconductor Reliability Handbook.

● The information contained herein is presented only as a guide for the applications of our products. No responsibility is assumed by TOSHIBA CORPORATION for any infringements of intellectual property or other rights of the third parties which may result from its use. No license is granted by implication or otherwise under any intellectual property or other rights of TOSHIBA CORPORATION or others.

● The information contained herein is subject to change without notice.

MAXIMUM RATINGS (Ta = 25°C)

CHARACTERISTIC			SYMBOL	RATING	UNIT
LED	Forward Current		I _F	50	mA
	Forward Current Derating (Ta≥53℃)		ΔI _F /℃	−0.7	mA/℃
	Peak Forward Current (100μs pulse, 100pps)		I _{FP}	1	A
	Power Dissipation		P _D	100	mW
	Power Dissipation Derating (Ta≥25℃)		ΔP _D /℃	−1.0	mW/℃
	Reverse Voltage		V _R	5	V
	Junction Temperature		T _j	125	℃
DETECTOR	Off-State Output Terminal Voltage		V _{DRM}	600	V
	On-State RMS Current	Ta=25℃	I _T (RMS)	100	mA
		Ta=70℃		50	
	On-State Current Derating (Ta≥25℃)		ΔI _T /℃	−1.1	mA/℃
	Peak On-State Current (100μs pulse, 120pps)		I _{TP}	2	A
	Peak Nonrepetitive Surge Current (P _w =10ms, DC=10%)		I _{TSM}	1.2	A
	Total Power Dissipation		P _D	300	mW
	Total Power Dissipation Derating (Ta=25℃)		ΔP _D /℃	−4.0	mW/℃
	Junction Temperature		T _j	115	℃
	Storage Temperature Range		T _{stg}	−55~125	℃
	Operating Temperature Range		T _{opr}	−40~100	℃
Lead Soldering Temperature (10s)		T _{sol}	260	℃	
Total Package Power Dissipation		P _T	330	mW	
Total Package Power Dissipation Derating (Ta≥25℃)		ΔP _T /℃	−4.4	mW/℃	
Isolation Voltage (AC, 1min., R.H.≤60%) (Note 2)		BV _S	5000	V _{rms}	

(Note 2) Pin 1, 2 and 3 shorted together and pin 4 and 6 shorted together.


RECOMMENDED OPERATING CONDITIONS

CHARACTERISTIC	SYMBOL	MIN.	TYP.	MAX.	UNIT
Supply Voltage	V _{AC}	—	—	240	V _{ac}
Forward Current	I _F	15	20	25	mA
Peak On-State Current	I _{TP}	—	—	1	A
Operating Temperature	T _{opr}	−25	—	85	°C

ELECTRICAL CHARACTERISTICS (Ta = 25°C)

CHARACTERISTIC		SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
LED	Forward Voltage	V_F	$I_F = 10\text{mA}$	1.0	1.15	1.3	V
	Reverse Current	I_R	$V_R = 5\text{V}$	—	—	10	μA
	Capacitance	C_T	$V = 0, f = 1\text{MHz}$	—	30	—	pF
DETECTOR	Peak Off-State Current	I_{DRM}	$V_{\text{DRM}} = 600\text{V}$	—	10	1000	nA
	Peak On-State Voltage	V_{TM}	$I_{\text{TM}} = 100\text{mA}$	—	1.7	3.0	V
	Holding Current	I_H	—	—	1.0	—	mA
	Critical Rate of Rise of Off-State Voltage	dv/dv	$V_{\text{in}} = 240\text{V}_{\text{rms}}, T_a = 85^\circ\text{C}$ (Note 3)	—	500	—	$\text{V} / \mu\text{A}$
	Critical Rate of Rise of Commutating Voltage	$dv/dt(c)$	$V_{\text{in}} = 60\text{V}_{\text{rms}}, I_T = 15\text{mA}$ (Note 3)	—	0.2	—	$\text{V} / \mu\text{A}$

(Note 3) dv/dt TEST CIRCUIT

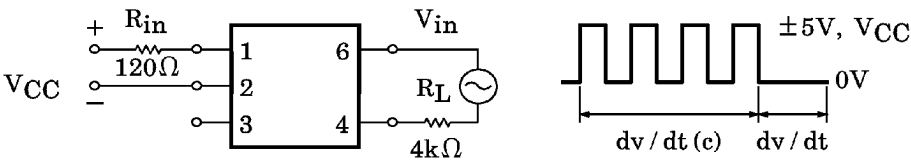

COUPLED ELECTRICAL CHARACTERISTICS (Ta = 25°C)

CHARACTERISTIC	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Trigger LED Current	I_{FT}	$V_T = 6\text{V}$	—	5	10	mA
Capacitance (Input to Output)	C_S	$V_S = 0, f = 1\text{MHz}$	—	0.8	—	pF
Isolation Resistance	R_S	$V_S = 500\text{V}$	5×10^{10}	10^{14}	—	Ω
Isolation Voltage	BV_S	AC, 1 minute	5000	—	—	V_{rms}
		AC, 1 second, in oil	—	10000	—	
		DC, 1 minute, in oil	—	10000	—	Vdc

