




MOS FIELD EFFECT POWER TRANSISTOR

2SK7 19

FAST SWITCHING
N-CHANNEL SILICON POWER MOS FET

PACKAGE DIMENSIONS

in millimeters

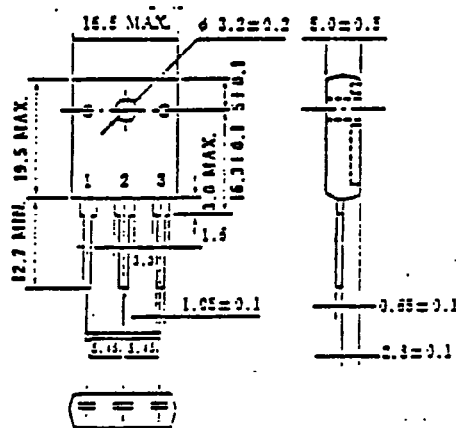

- 1 Gate
2 Drain
3 Source

FEATURES

- Suitable for switching power supplies, actuator controls, and pulse circuits
- Low $R_{DS(on)}$
- No second breakdown

ABSOLUTE MAXIMUM RATINGS ($T_a=25^{\circ}\text{C}$)

Drain to Source Voltage	V _{DSS}	900V
Gate to Source Voltage	V _{GSS}	±20V
Continuous Drain Current	I _D (DC)	±5A
Total Power Dissipation	P _T	120W
Channel Temperature	T _{ch}	150°C
Storage Temperature	T _{stg}	-55~150 °C
	T _J	25°C

ELECTRICAL CHARACTERISTICS ($T_a=25^{\circ}\text{C}$)




CHARACTERISTIC	SYMBOL	MIN.	TYP.	MAX.	UNIT.	TEST CONDITIONS
Drain Leakage Current	IDSS			100	μA	$V_{DS}=100V, V_{GS}=0$
Gate to Source Leakage Current	IGSS			± 100	nA	$V_{GS}=\pm 20V, V_{DS}=0$
Gate to Source Cutoff Voltage	$V_{GS(off)}$	1.5		3.5	V	$V_{DS}=10V, I_D=-1mA$
Forward Transfer Admittance	$ y_{fs} $	1.0	2.5		S	$V_{DS}=20V, I_D=3.0A$
Drain to source On-State Resistance	$R_{DS(on)}$		3.2	4.0	Ω	$V_{GS}=10V, I_D=3.0A$
Input Capacitance	C_{iss}		950		pF	$V_{DS}=10V$
Output Capacitance	C_{oss}		170		pF	$V_{GS}=0$
Reverse Transfer Capacitance	C_{rss}		65		pF	$f=1MHz$
Turn-On Delay Time	$t_{d(on)}$		15		ns	$I_D=3.0A, V_{GS}=10V$
Rise Time	t_r		40		ns	$V_{GS(on)}=10V$
Turn-Off Delay Time	$t_{d(off)}$		80		ns	$R_L=100\Omega$
Fall Time	t_f		20		ns	

2SK719




98 DE 6427525 0018898 9







NEC ELECTRON DEVICE


TURN-ON AND TURN-OFF TIME TEST CIRCUIT

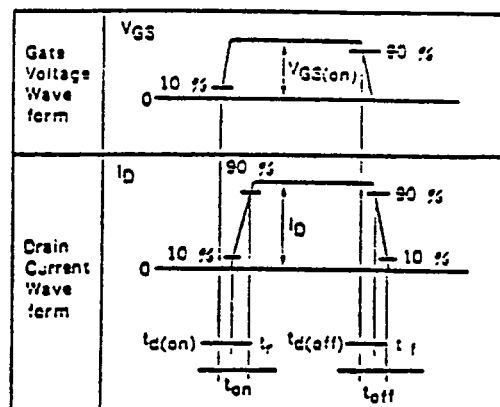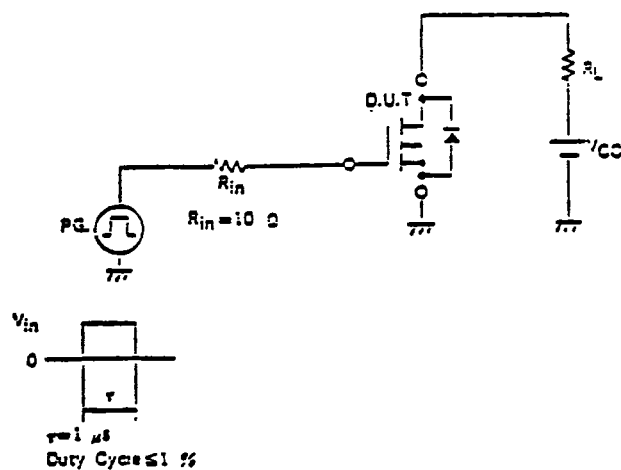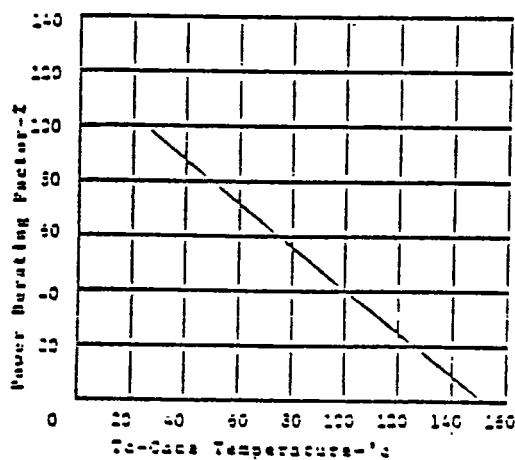DERATING FACTOR OF FORWARD BIAS
SAFE OPERATING AREA

FORWARD BIAS SAFE OPERATING AREA

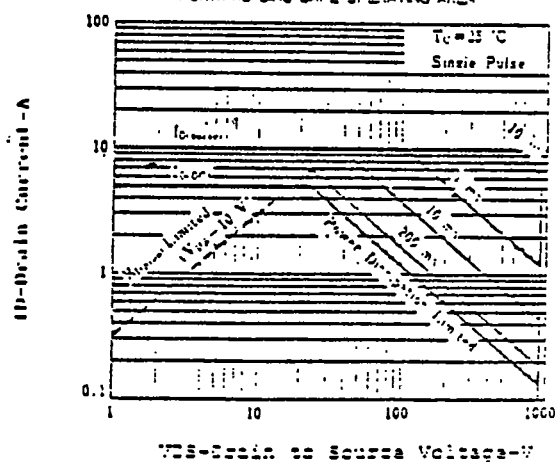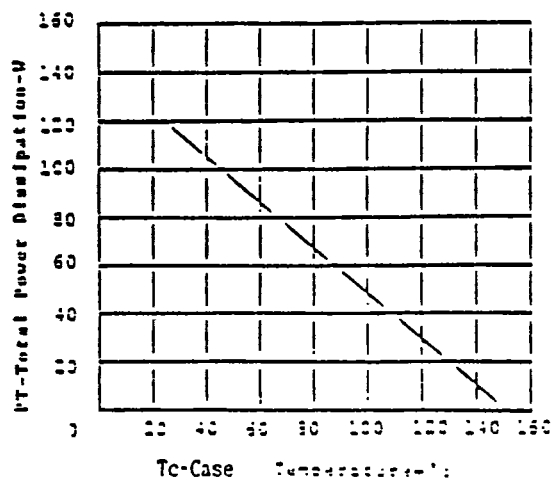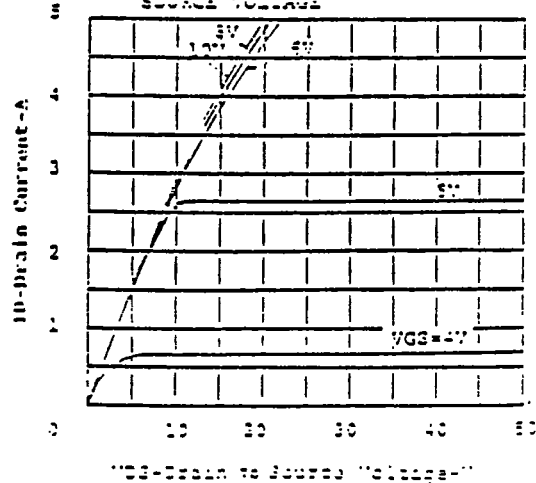TOTAL POWER DISSIPATION VS.
CASE TEMPERATUREDRAIN CURRENT vs. DRAIN TO
SOURCE VOLTAGE

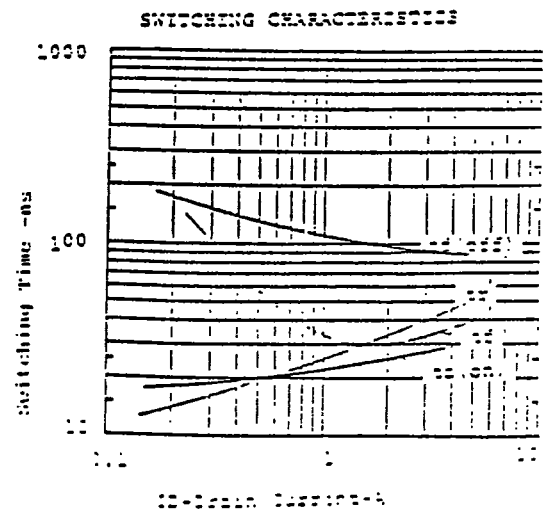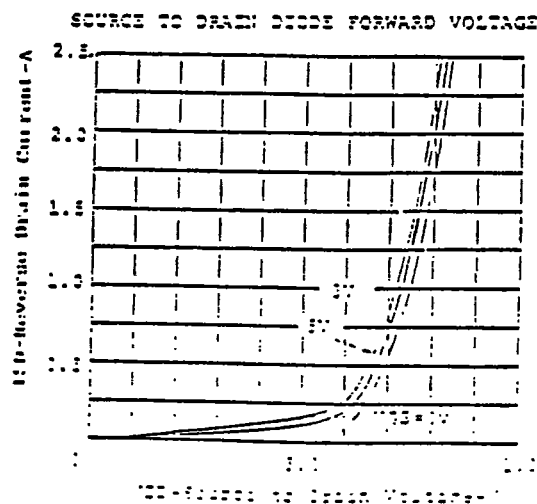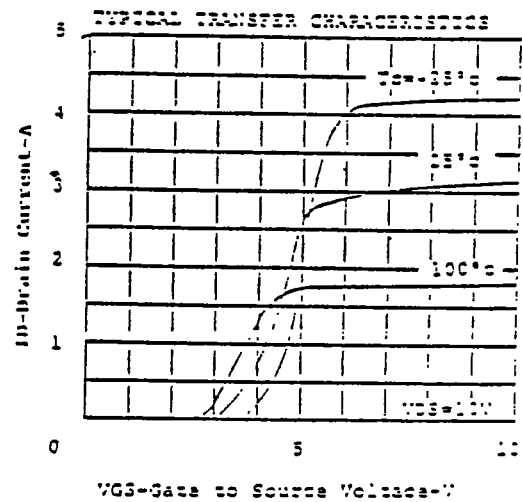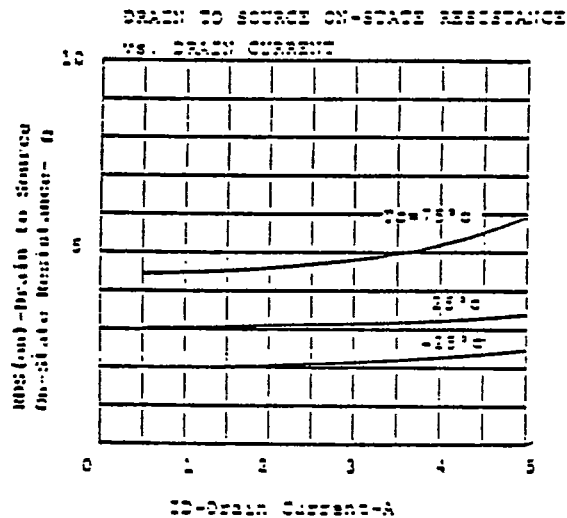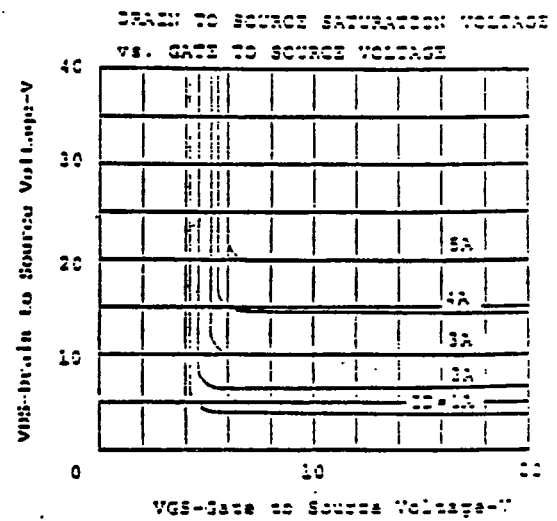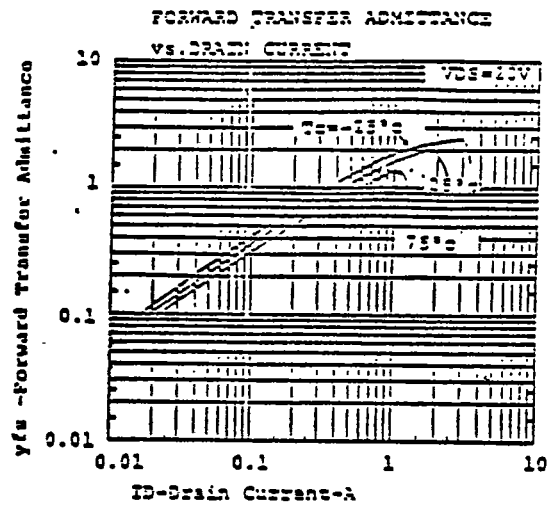

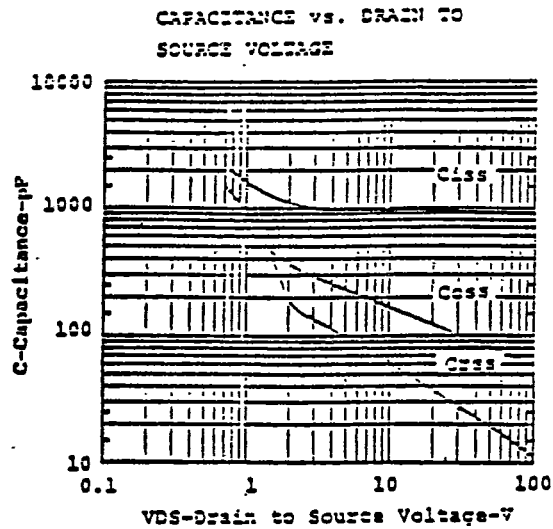

NEC Corporation

INTERNATIONAL ELECTRON DEVICES DIV.
NEC Building, 33-1, Shiba Guchome
Minato-ku, Tokyo 103, Japan
Tel: Tokyo 454-1111
Telex Address: NECTOK J22586
Cable Address: MICROPHONE TOKYO